

Dane aktualne na dzień: 25-09-2026 06:21

Link do produktu: <https://www.akumulatory24.pl/trojan-24tmx-12v-85ah-p-3677.html>



TROJAN 24TMX 12V 85Ah

Cena brutto	948,33 zł
Cena netto	771,00 zł
Dostępność	Dostępny
Czas wysyłki	24 godziny
Kod producenta	24TMX
Kod EAN	8404653001681
Producent	Trojan
Model	24TMX
Napięcie [V]	12
Pojemność [Ah]	85
Długość [L mm]	277
Szerokość [W mm]	168
Wysokość [H mm]	235
Waga [kg]	21

Opis produktu

85Ah (Długo Głębokie Rozładowanie TROJAN 24TMX 12V

Trojan 24TMX 12V 85Ah jest akumulatorem o napięciu 12V i pojemności 85Ah. Jest to akumulator głębokiego rozładowania, który może być używany do zasilania różnych urządzeń elektrycznych. Akumulator jest wykonany z wysokiej jakości materiałów i jest odporny na uszkodzenia mechaniczne. Jest to akumulator o długiej żywotności, który może być używany przez wiele lat.

Najważniejsze Zalety i Cechy Akumulatora:

- Wysoka pojemność 85Ah, która zapewnia długie działanie urządzenia zasilanego tym akumulatorem.

SPECYFIKACJA TECHNICZNA

Waga: 21 kg, Długość: 277 mm, Szerokość: 168 mm, Wysokość: 235 mm, Napięcie: 12V, Pojemność: 85Ah, Kod producenta: 24TMX, Kod EAN: 8404653001681.



DATA SHEET

MOTIVE 24TMX

MODEL **24TMX with POD vent**
VOLTAGE **12**
MATERIAL **Polypropylene**
DIMENSIONS **Inches (mm)**
BATTERY **Deep-Cycle Flooded/Wet Lead-Acid Battery**
COLOR **Maroon**
WATERING **No Watering System Available**



WITH **T₂** TECHNOLOGY



12 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	VOLTAGE	CELL(S)	TERMINAL TYPE ^a	DIMENSIONS ^a INCHES (mm)			WEIGHT ^a LBS. (kg)
24	24TMX	12	6	7, 8, 9, 16	LENGTH	WIDTH	HEIGHT ^f	47 (21)
					10.92 (277)	6.62 (168)	9.25 (235)	

ELECTRICAL SPECIFICATIONS

CRANKING PERFORMANCE		CAPACITY ^a MINUTES		CAPACITY ^a AMP-HOURS (Ah)				ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
C.C.A. ^b @ 0°F (-18°C)	C.A. ^c @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	—	—
—	—	140	36	70	78	85	94	1.13		

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)				
SYSTEM VOLTAGE	12V	24V	36V	48V
Bulk Charge	14.82	29.64	44.46	59.28
Float Charge	13.50	27.00	40.50	54.00
Equalize Charge	16.20	32.40	48.60	64.80
Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.				

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA



OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.

RECYCLE RESPONSIBLY






STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	12 VOLT
100	1.277	2.122	12.73
90	1.258	2.103	12.62
80	1.238	2.083	12.50
70	1.217	2.062	12.37
60	1.195	2.040	12.24
50	1.172	2.017	12.10
40	1.148	1.993	11.96
30	1.124	1.969	11.81
20	1.098	1.943	11.66
10	1.073	1.918	11.51

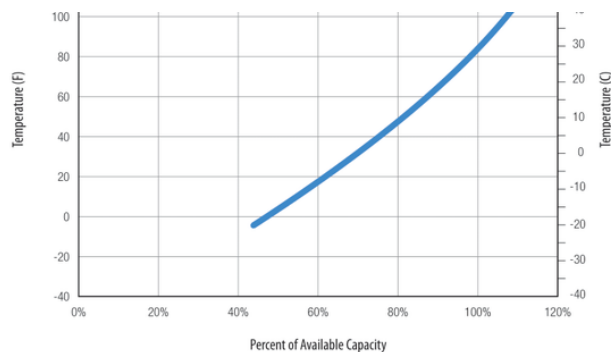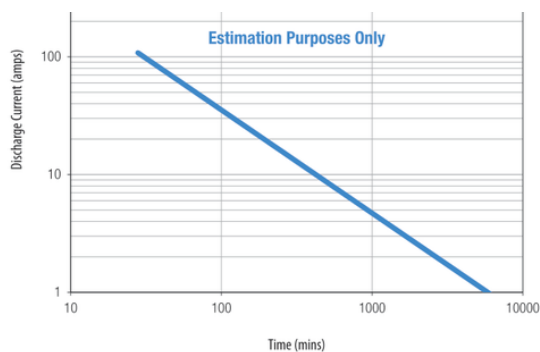

BATTERY DIMENSIONS (shown with WNT)

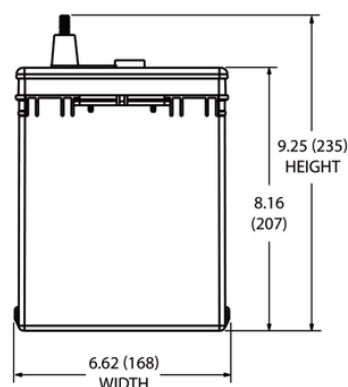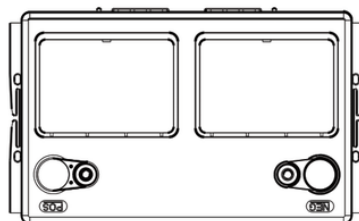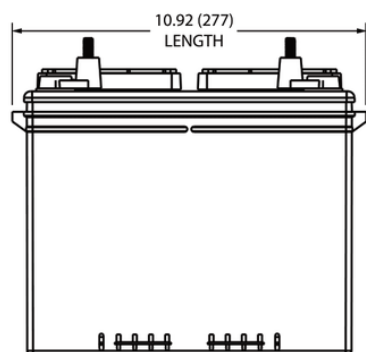

TERMINAL CONFIGURATIONS[®]

7	UT	UNIVERSAL TERMINAL
	Terminal Height Inches (mm) 1.10 (28) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	
9	WNT	WINGNUT TERMINAL
	Terminal Height Inches (mm) 1.50 (38) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	

8	AP	AUTOMOTIVE POST TERMINAL
	Terminal Height Inches (mm) 0.83 (21) Torque Values in-lb (Nm) 50 – 70 (6 – 8)	
16	SLT	SMALL L-TERMINAL
	Terminal Height Inches (mm) 1.31 (33) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- D.** C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.

- E.** C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- G.** Terminal images are representative only.
- H.** Weight may vary.



Designed in compliance with applicable BCI, DIN, BS and IEC standards.
Tested in compliance to BCI and IEC standards.