Dane aktualne na dzień: 09-11-2026 21:01

Link do produktu: https://www.akumulatory24.pl/trojan-27tmx-12v-105ah-p-3678.html



TROJAN 27TMX 12V 105Ah 27-TMX

Cena brutto	**1 059,00 zł**
Cena netto	**860,98 zł**
Dostępność	**Dostępny**
Czas wysyłki	**24 godziny**
Kod producenta	**27TMX**
Kod EAN	**3660766467997**
Producent	**Trojan**
Model	**27TMX**
Napięcie [V]	**12**
Pojemność [Ah]	**105**
Długość [L mm]	**326**
Szerokość [W mm]	**168**
Wysokość [H mm]	**247**
Waga [kg]	**25**

Opis produktu

Akumulator Głęboko Cykliczny Rozładowanie TROJAN 27TMX 12V 105Ah (Deep Cycle)

Najważniejsze Zalety i Cechy Akumulatora:

- [illegible]

SPECYFIKACJA TECHNICZNA

TROJAN BATTERY COMPANY

DATA SHEET MOTIVE 27TMX

MODEL **27TMX with POD vent**
VOLTAGE **12**
MATERIAL **Polypropylene**
DIMENSIONS **Inches (mm)**
BATTERY **Deep-Cycle Flooded/Wet Lead-Acid Battery**
COLOR **Maroon**
WATERING **No Watering System Available**

MADE IN THE USA
WITH T2 TECHNOLOGY



12 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	VOLTAGE	CELL(S)	TERMINAL TYPE [G]	DIMENSIONS [C] INCHES (mm)			WEIGHT [H] LBS. (kg)
					LENGTH	WIDTH	HEIGHT [F]	
27	27TMX	12	6	7, 8, 9, 16	12.84 (326)	6.60 (168)	9.74 (247)	55 (25)

ELECTRICAL SPECIFICATIONS

CRANKING PERFORMANCE		CAPACITY [A] MINUTES		CAPACITY [B] AMP-HOURS (Ah)				ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
C.C.A.[D] @ 0°F (-18°C)	C.A.[E] @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr		
—	—	175	45	85	97	105	117	1.40	—	—

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)				
SYSTEM VOLTAGE	12V	24V	36V	48V
Bulk Charge	14.82	29.64	44.46	59.28
Float Charge	13.50	27.00	40.50	54.00
Equalize Charge	16.20	32.40	48.60	64.80

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA

OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.


RECYCLE RESPONSIBLY




STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	12 VOLT
100	1.277	2.122	12.73
90	1.258	2.103	12.62
80	1.238	2.083	12.50
70	1.217	2.062	12.37
60	1.195	2.040	12.24
50	1.172	2.017	12.10
40	1.148	1.993	11.96
30	1.124	1.969	11.81
20	1.098	1.943	11.66
10	1.073	1.918	11.51


TROJAN 27TMX PERFORMANCE

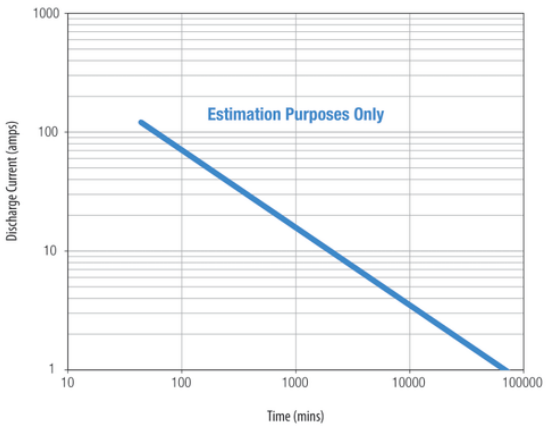

PERCENT CAPACITY VS. TEMPERATURE

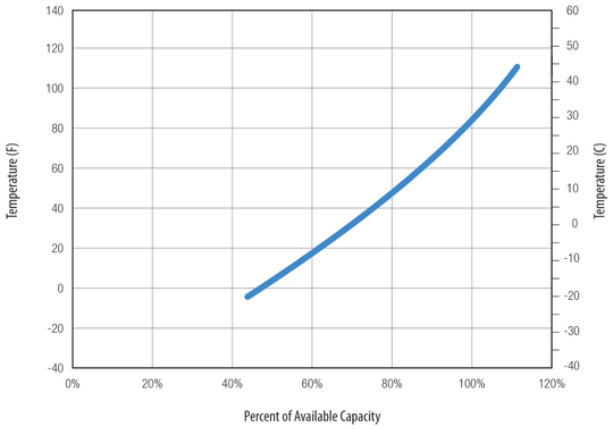

BATTERY DIMENSIONS (shown with WNT)

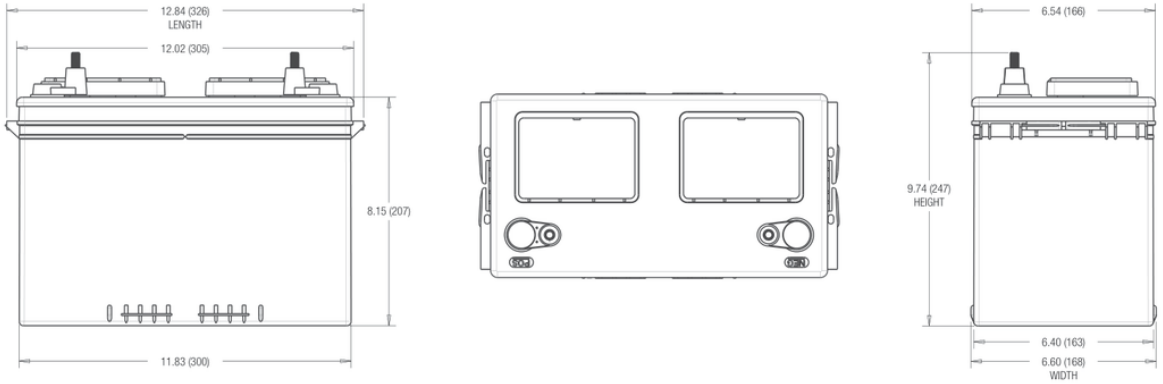

TERMINAL CONFIGURATIONS[G]

7 UT	UNIVERSAL TERMINAL
	**Terminal Height Inches (mm)** 1.10 (28) **Torque Values in-lb (Nm)** 95 – 105 (11 – 12) **Bolt** 5/16"

8 AP	AUTOMOTIVE POST TERMINAL
	**Terminal Height Inches (mm)** 0.83 (21) **Torque Values in-lb (Nm)** 50 – 70 (6 – 8)

9 WNT	WINGNUT TERMINAL
	**Terminal Height Inches (mm)** 1.50 (38) **Torque Values in-lb (Nm)** 95 – 105 (11 – 12) **Bolt** 5/16"

16 SLT	SMALL L-TERMINAL
	**Terminal Height Inches (mm)** 1.31 (33) **Torque Values in-lb (Nm)** 95 – 105 (11 – 12) **Bolt** 5/16"