

Dane aktualne na dzień: 25-09-2026 06:21

Link do produktu: <https://www.akumulatory24.pl/trojan-30xhs-12v-130ah-p-3679.html>



TROJAN 30XHS 12V 130Ah 30-XHS

Cena brutto	1 409,58 zł
Cena netto	1 146,00 zł
Dostępność	Dostępny
Czas wysyłki	14 dni
Kod producenta	30XHS
Kod EAN	8404653001704
Producent	Trojan
Model	30XHS
Napięcie [V]	12
Pojemność [Ah]	130
Długość [L mm]	354
Szerokość [W mm]	171
Wysokość [H mm]	256
Waga [kg]	30

Opis produktu

130Ah (Deep Cycle) Rozładowanie TROJAN 30XHS 12V

Trojan 30XHS (miejscem nazywany 30XHS) jest głęboko cyklicznym akumulatorem 12V o pojemności 130Ah, zaprojektowany do długiego czasu pracy w cyklu ładowania i rozładowania. Akumulator jest przeznaczony do zastosowań, w których wymagana jest duża pojemność i długie życie.

Najważniejsze Zalety i Cechy Akumulatora:

SPECYFIKACJA TECHNICZNA



DATA SHEET

MOTIVE 30XHS

MODEL **30XHS with POD vent**
VOLTAGE **12**
MATERIAL **Polypropylene**
DIMENSIONS **Inches (mm)**
BATTERY **Deep-Cycle Flooded/Wet Lead-Acid Battery**
COLOR **Maroon**
WATERING **No Watering System Available**



WITH **T₂** TECHNOLOGY



12 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	VOLTAGE	CELL(S)	TERMINAL TYPE ^a	DIMENSIONS ^a INCHES (mm)			WEIGHT ^a LBS. (kg)
30H	30XHS	12	6	7, 8, 9	LENGTH	WIDTH	HEIGHT ^f	66 (30)
					13.94 (354)	6.75 (171)	10.09 (256)	

ELECTRICAL SPECIFICATIONS

CRANKING PERFORMANCE		CAPACITY ^a MINUTES		CAPACITY ^a AMP-HOURS (Ah)				ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
C.C.A. ^b @ 0°F (-18°C)	C.A. ^c @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	—	—
—	—	225	57	105	120	130	144	1.73		

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)				
SYSTEM VOLTAGE	12V	24V	36V	48V
Bulk Charge	14.82	29.64	44.46	59.28
Float Charge	13.50	27.00	40.50	54.00
Equalize Charge	16.20	32.40	48.60	64.80
Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.				

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA

OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.


RECYCLE RESPONSIBLY




STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	12 VOLT
100	1.277	2.122	12.73
90	1.258	2.103	12.62
80	1.238	2.083	12.50
70	1.217	2.062	12.37
60	1.195	2.040	12.24
50	1.172	2.017	12.10
40	1.148	1.993	11.96
30	1.124	1.969	11.81
20	1.098	1.943	11.66
10	1.073	1.918	11.51


TROJAN 30XHS PERFORMANCE

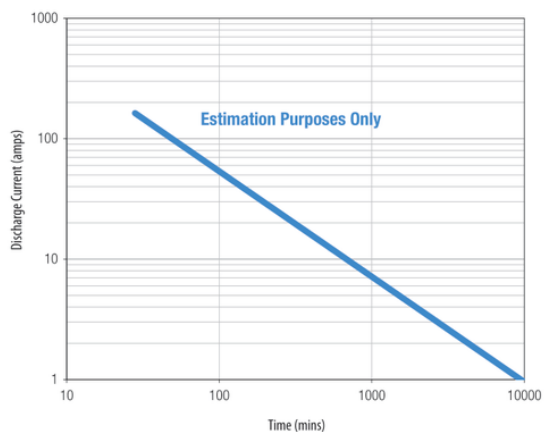

PERCENT CAPACITY VS. TEMPERATURE

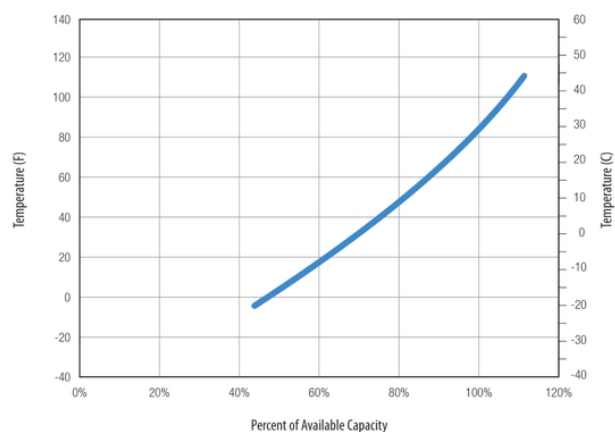

BATTERY DIMENSIONS (shown with WNT)

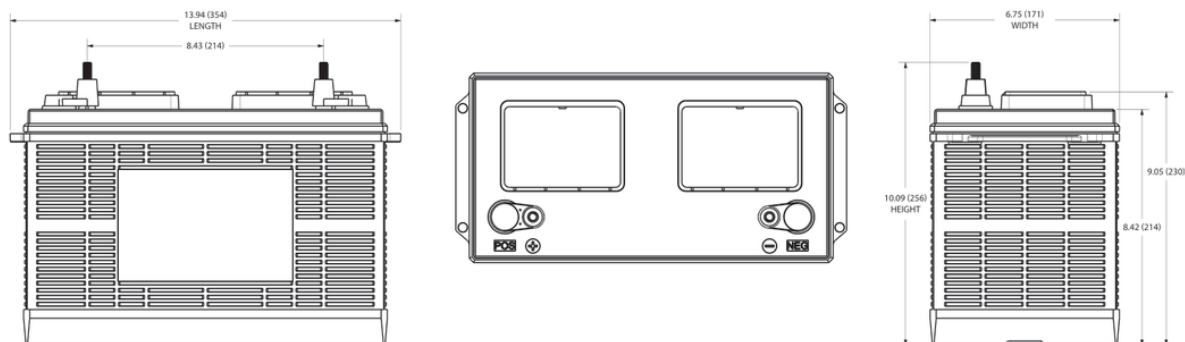

TERMINAL CONFIGURATIONS⁶

7	UT	UNIVERSAL TERMINAL
	Terminal Height Inches (mm) 1.10 (28) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	
9	WNT	WINGNUT TERMINAL
	Terminal Height Inches (mm) 1.50 (38) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	
8	AP	AUTOMOTIVE POST TERMINAL
	Terminal Height Inches (mm) 0.83 (21) Torque Values in-lb (Nm) 50 – 70 (6 – 8)	