

Dane aktualne na dzień: 26-09-2026 11:36

Link do produktu: <https://www.akumulatory24.pl/trojan-j305e-ac-6v-305ah-p-3676.html>



TROJAN J305E-AC 6V 305Ah

Cena brutto	1 655,95 zł
Cena netto	1 346,30 zł
Dostępność	Dostępny
Czas wysyłki	24 godziny
Kod producenta	J305E-AC
Kod EAN	8404653001582
Producent	Trojan
Model	J305E-AC
Napięcie [V]	6
Pojemność [Ah]	305
Długość [L mm]	314
Szerokość [W mm]	174
Wysokość [H mm]	366
Waga [kg]	38

Opis produktu

305Ah (Deep Cycle) Rozładowanie TROJAN J305E-AC 6V

Trojan J305E-AC to akumulator głębokiego rozładowania, przeznaczony do zastosowań, gdzie wymagane jest długie i regularne ładowanie. Jest to akumulator o napięciu 6V i pojemności 305Ah. Jest to akumulator o konstrukcji odpornej na uszkodzenia mechaniczne i chemiczne. Jest to akumulator o długiej żywotności i wysokiej wydajności.

Najważniejsze Zalety i Cechy Akumulatora:

- Długa żywotność i wysoka wydajność.

SPECYFIKACJA TECHNICZNA



TROJAN
BATTERY COMPANY

DATA SHEET

MOTIVE J305E-AC

MODEL **J305E-AC with Bayonet Cap**
VOLTAGE **6**
MATERIAL **Polypropylene**
DIMENSIONS **Inches (mm)**
BATTERY **Deep-Cycle Flooded/Wet Lead-Acid Battery**
COLOR **Maroon**
WATERING **HydroLink™ Watering System**



WITH **T₂** TECHNOLOGY



6 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	VOLTAGE	CELL(S)	TERMINAL TYPE ^a	DIMENSIONS ^a INCHES (mm)			WEIGHT ^a LBS. (kg)
902	J305E-AC	6	3	4	LENGTH	WIDTH	HEIGHT ^f	83 (38)
					12.35 (314)	6.85 (174)	14.41 (366)	

ELECTRICAL SPECIFICATIONS

CRANKING PERFORMANCE		CAPACITY ^a MINUTES		CAPACITY ^a AMP-HOURS (Ah)				ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
C.C.A. ^b @ 0°F (-18°C)	C.A. ^c @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	—	—
—	—	645	160	250	280	305	339	2.03		

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)					
SYSTEM VOLTAGE	6V	12V	24V	36V	48V
Bulk Charge	7.41	14.82	29.64	44.46	59.28
Float Charge	6.75	13.50	27.00	40.50	54.00
Equalize Charge	8.10	16.20	32.40	48.60	64.80

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

CHARGING TEMPERATURE COMPENSATION

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA

OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 – 15% per month depending on storage temperature conditions.


RECYCLE RESPONSIBLY




STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	6 VOLT
100	1.277	2.122	6.37
90	1.258	2.103	6.31
80	1.238	2.083	6.25
70	1.217	2.062	6.19
60	1.195	2.040	6.12
50	1.172	2.017	6.05
40	1.148	1.993	5.98
30	1.124	1.969	5.91
20	1.098	1.943	5.83
10	1.073	1.918	5.75




TROJAN J305E-AC PERFORMANCE

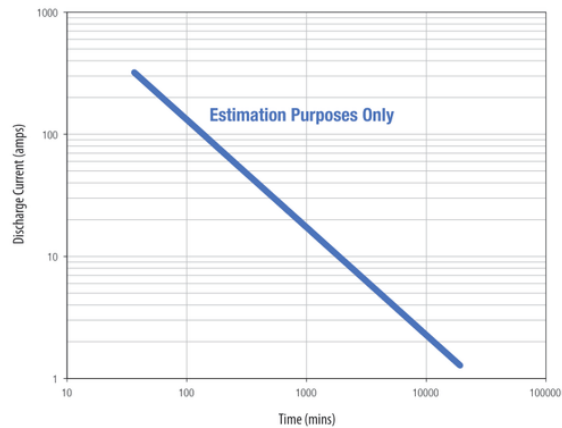

PERCENT CAPACITY VS. TEMPERATURE

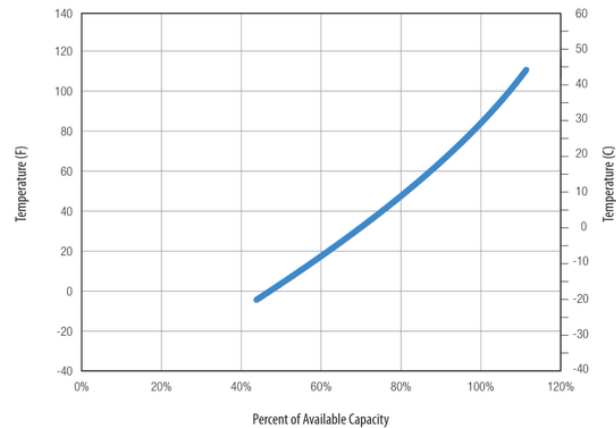

BATTERY DIMENSIONS (shown with UT)

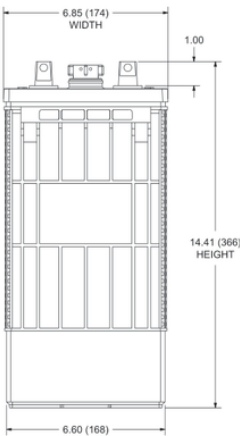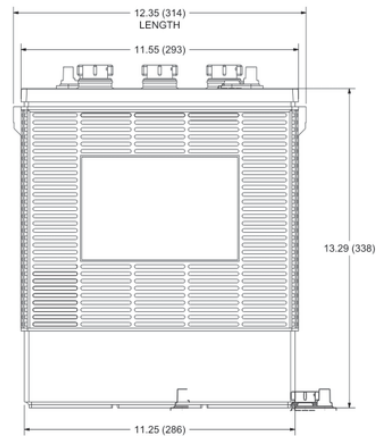

TERMINAL CONFIGURATIONS⁶

4	EUTR	EMBEDDED UNIVERSAL TERMINAL REVERSE
	Terminal Height Inches (mm) 1.10 (28) Torque Values in-lb (Nm) 95 – 105 (11 – 12) Bolt 5/16"	