Dane aktualne na dzień: 01-11-2026 15:21

Link do produktu: https://www.akumulatory24.pl/trojan-t105-aes-p-3957.html




# TROJAN T105-AES AGM 6V 207Ah T-105-AES

| | |
|---|---|
| Cena brutto | **1 425,57 zł** |
| Cena netto | **1 159,00 zł** |
| Dostępność | **Dostępny** |
| Czas wysyłki | **7 dni** |
| Kod producenta | **T105-AES** |
| Kod EAN | **844199053979** |
| Producent | **Trojan** |
| Model | **T105-AES** |
| Napięcie [V] | **6** |
| Pojemność [Ah] | **207** |
| Polaryzacja [+-] | **Prawy Plus** |
| Długość [L mm] | **262** |
| Szerokość [W mm] | **179** |
| Wysokość [H mm] | **273** |
| Waga [kg] | **32** |

## Opis produktu

## Akumulator (Deep Cycle) 6V 207Ah Rozładowanie TROJAN T105-AES AGM

**Najważniejsze Zalety i Cechy Akumulatora:**

- [illegible]

## SPECYFIKACJA TECHNICZNA

[illegible]

**Producenci stosujący akumulatory Trojan:**

**Akumulatory do pojazdów elektrycznych** - do wszelkiego rodzaju pojazdów golfowych, pojazdów użytkowych , pojazdów platformowych, samochodów elektrycznych ( Club Car, Columbia Parcar, Cruise Car, Emerald, E-Z-GO, Fairplay, GEM, John Deere, Taylor Dunn, Yamaha )

**Akumulatory do maszyn transportowych i podnoszących** - do wózków jezdniowych, wózków widłowych, holowników, platform, podnośników koszowych ( Ballymore, Bil-jax, Cotterman, Crown, Genie, Grove, JLG, Mayville, Niftylift, Skyjack, Snorkel, Terex, Upright, Waldon )

**Akumulatory do maszyn czyszczących** ( American-Lincoln, Clarke, Kent/Euroclean, Lavor Pro, Mid-Central, Minuteman, NSS, Nilfisk-Advance, Pacific Steamex, Pioneer/Eclipse, Pullman/Holt, Taski, Tennant/ Castex, Tennant/ Nobles, Tornado, Windsor, Yale )
Akumulatory "marine" - do łodzi o napędzie elektrycznym, do zasilania urządzeń elektrycznych na łodziach i jachtach o napędzie spalinowym

**Akumulatory do energii odnawialnej** - do instalacji solarnych, małych elektrowni wiatrowych i wodnych

TROJAN BATTERY COMPANY

DATA SHEET

# MOTIVE T105-AES

| | |
|---|---|
| MODEL | **T105-AES** |
| VOLTAGE | **6** |
| CAPACITY | **207 Ah @ 20Hr** |
| MATERIAL | **Polypropylene** |
| BATTERY | **VRLA AGM / Non-Spillable / Maintenance-Free** |
| COLOR | **Maroon** |
| WATERING | **No Watering Required** |




## 6 VOLT

### PHYSICAL SPECIFICATIONS

| BCI | MODEL NAME | TERMINAL TYPE | DIMENSIONS [C] INCHES (mm) | | | WEIGHT [I] LBS. (kg) | HANDLES | INSTALLATION ORIENTATION |
|---|---|---|---|---|---|---|---|---|
| | | | LENGTH | WIDTH | HEIGHT [F] | | | |
| GC2 | T105-AES | M8/AP/LT | 10.30 (262) | 7.06 (179) | 10.73 (273) | 70 (32) | Embedded | Horizontal and Vertical |

### ELECTRICAL SPECIFICATIONS

| VOLTAGE | CRANKING PERFORMANCE | | CAPACITY [A] MINUTES | | CAPACITY [B] AMP-HOURS (Ah) | | | | ENERGY (kWh) | INTERNAL RESISTANCE (mΩ) | SHORT CIRCUIT CURRENT (amps) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | C.C.A. [D] @0°F | C.A. [E] @32°F | @ 25 Amps | @ 75 Amps | 5-Hr | 10-Hr | 20-Hr | 100-Hr | 100-Hr | | |
| 6 | – | – | 420 | 113 | 170 | 185 | 207 | 225 | 1.35 | 1.9 | 3250 |

### CHARGING INSTRUCTIONS

| CHARGER VOLTAGE SETTINGS (AT 77°F/25°C) | | | | | |
|---|---|---|---|---|---|
| **SYSTEM VOLTAGE** | **6V** | **12V** | **24V** | **36V** | **48V** |
| **Maximum Charge Current** (A) | 50% of $C_{20}$ | | | | |
| **Absorption Voltage** (2.40 V/cell) | 7.20 | 14.40 | 28.80 | 43.20 | 57.60 |
| **Float Voltage** (2.25 V/cell) | 6.75 | 13.50 | 27.00 | 40.50 | 54.00 |

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

### CHARGING TEMPERATURE COMPENSATION

| ADD | SUBTRACT |
|---|---|
| 0.005 volt per cell for every 1°C below 25°C<br>0.0028 volt per cell for every 1°F below 77°F | 0.005 volt per cell for every 1°C above 25°C<br>0.0028 volt per cell for every 1°F above 77°F |

### OPERATIONAL DATA

| OPERATING TEMPERATURE | SELF DISCHARGE |
|---|---|
| -40°F to 140°F (-40°C to +60°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%. | Less than 3% per month depending on storage temperature conditions |

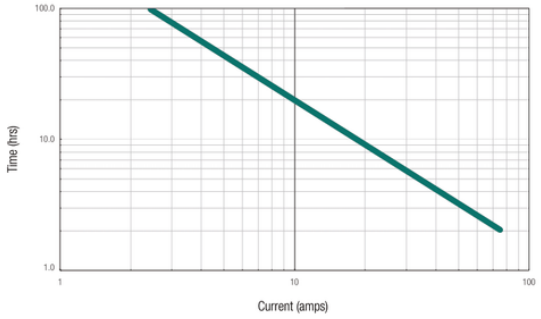
### RECYCLE RESPONSIBLY



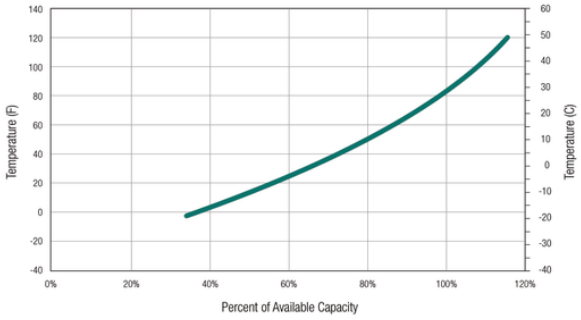

### STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

| PERCENTAGE CHARGE | CELL | 6 VOLT |
|---|---|---|
| 100 | 2.14 | 6.42 |
| 75 | 2.09 | 6.27 |
| 50 | 2.04 | 6.12 |
| 25 | 1.99 | 5.97 |
| 0 | 1.94 | 5.82 |

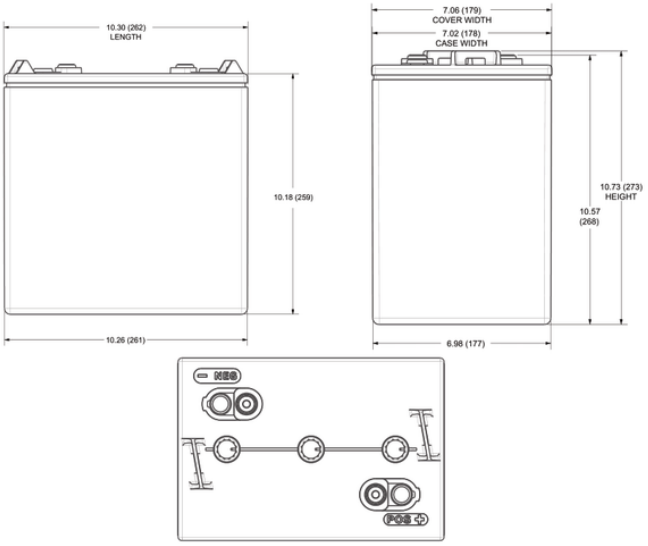
## TROJAN T105-AES PERFORMANCE



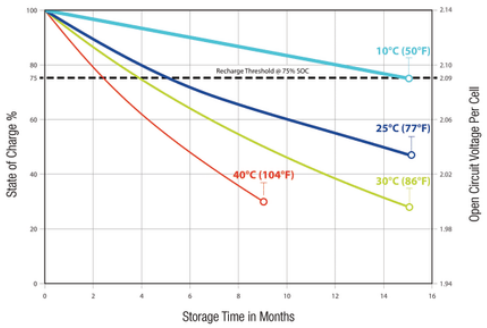

## PERCENT CAPACITY VS. TEMPERATURE





## BATTERY DIMENSIONS (shown with M8)





## SELF DISCHARGE VS. TIME[H]




## TERMINAL TYPE[G]

| 15 M8 | M8 |
|---|---|
|  | **Battery Height with Terminal in Inches (mm)**<br>10.57 (268)<br>**Torque Values in-lb (Nm)**<br>Bolt: 85 – 90 (10 – 11) |

| 15 M8 | M8 WITH LT ADAPTER (ADAPTER PROVIDED BUT NOT INSTALLED) |
|---|---|
|  | **Battery Height with Terminal in Inches (mm)**<br>12.07 (307)<br>**Torque Values in-lb (Nm)**<br>Connection to M8: 85 – 90 (10 – 11)<br>Connection to LT: 65 – 75 (7.5 – 8.5)<br>**Bolt Size**<br>M8 x 1.25 |

| 15 M8 | M8 WITH AP ADAPTER (ADAPTER PROVIDED BUT NOT INSTALLED) |
|---|---|
|  | **Battery Height with Terminal in Inches (mm)**<br>11.41 (290)<br>**Torque Values in-lb (Nm)**<br>Connection to M8: 85 – 90 (10 – 11)<br>Connection to AP: 50 – 70 (6 – 8) |

A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
B. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
C. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.
E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
F. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
G. Terminal images are representative only.
H. Batteries in storage should be charged when they decline to 75% State of Charge (SOC).
I. Weight may vary.

Designed in compliance with applicable BCI, DIN, BS and IEC standards.
Tested in compliance to BCI and IEC standards.

TROJAN BATTERY COMPANY

800.423.6569 / +1.562.236.3000 / trojanbattery.com

© 2023 Trojan Battery Company, LLC. All rights reserved. Trojan Battery Company is not liable for damages that may result from any information provided in or omitted from this publication, under any circumstances. Trojan Battery Company reserves the right to make adjustments to this publication at any time, without notice or obligation.

2023001-T105-AES-Datasheet
REV: 7/10/23